# This Page Is Inserted by IFW Operations and is not a part of the Official Record

# **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

# IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problems Mailbox.

#### PCT

# WORLD INTELLECTUAL PROPERTY GROANIZATION lateralional Bureau



#### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) Intermetional Patent Classification 6:		(11) International Publication Number: WO 97/37536		
A01N 1/00	Al	(43) Intermational Publication Dates 16 October 1997 (16.10.9)		
(21) International Application Number: PCT/US:  (22) International Filing Date: 8 April 1997 (1)  (20) Priority Data: 60/015,071 9 April 1996 (09.04.96)  (71) Applicant: THERAKOS, INC. (US/US): 437 Creaming Enton, PA 19341 (US).  (72) Inventor: LEE, Kyu, H.; 60S Cornerstone Land, Bry PA 19010 (US).  (74) Agents: CIAMPORCERO, Audiey, A. or al.; Johnson, One Johnson & Johnson Flexa, New Br NJ 08933 (US).	Lery Warn May	BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, OT HU, II., IS, IP, KE, KG, KP, KR, KZ, LC, LK, LR, LS LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PI PT, RO, RU, SD, SE, SG, SI, SK, TI, TM, TR, TT, UJ UG, UZ, VN, ARIPO patent (OH, KE, LS, MW, SD, SS UG), Eurusian patent (AM, AZ, BY, KG, KZ, MD, RU, T TM), European patent (AT, BE, CH, DB, DK, ES, FI, PF GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BI BJ, CP, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG  Published Will international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of		
(54) Tide: METHOD FOR REMOVAL OF PSORALENS	PRO	( BIOLOGICAL PLUIDS		

A method for the removal of passalous and passalous degradation products is disclosed. The method of the present invention is useful for any biological fluid that has been treated with passalous, including blood and blood fractions and components derived therefrom. Biological fluids treated according to the method of the present invention are substantially free from any residual passalous degradation products.

WO 97/2/536 PCT/US97/05785

#### TITLE OF THE INVENTION

## METHOD FOR REMOVAL OF PSORALENS FROM BIOLOGICAL FLUIDS

#### BACKGROUND OF THE INVENTION

Recently, because of potential risks involved with donated blood, methods for inactivating pathogenic agents that may be found in donor blood or blood components are being actively investigated. One of the most promising approaches is inactivating pathogenic agents by photochemical treatment. One of the main problems in most photochemical treatment methods is reducing the residual photosensitizer or its decomposed products in the treated blood to sufficiently low-level so that the treated blood or blood product can be transfused to patient. Even though all donor blood is tested for possible contamination with known pathogens it is currently not possible to completely eliminate all contaminated blood from the donor blood pool.

15

20

This is caused by several circumstances. For instance, when a person is infected with viruses such as human immunodeficiency viruses (HIV) which causes AIDS, there is a period during which the anti-HIV antibody titer is too low for positive detection by current screening tests. Therefore, blood donated by an HIV infected person during this period may pass the antibody screening tests and could infect any recipients of the donated blood or blood products made therefrom. Also, there is always the possibility that the donated blood is contaminated by unknown or undetected pathogens. For these reasons currently there is an urgent need for methods to eliminate those undetected pathogens in the donated blood or blood components derived therefrom for human use.

25

30

Wiesehahn et al. (U. S. Patent No. 4,727,027; 4748,120; and 5,176,921) and Isaacs et al. (U.S. Patent No. 5,139,940) described methods for deactivating pathogens in biological fluids by UVA irradiation in the presence of psoralen derivatives such as 8-methoxy psoralen(8-MOP), 4'hydroxymethyl-4, 5',8-trimethylpsoralen (HMF); 4'-aminomethyl-4', 5'8-trimethylpsoralen(AMT), or other psoralen derivatives. In this process only a small fraction of the total amount of psoralen compound added is consumed in inactivating those pathogens and the remainder of the added psoralen compound either remains in the treated blood as original psoralen compound or remains in the treated blood as psoralen decomposition products.

35

The amount of these residual compounds in the treated blood or blood component could be very substantial and when a patient is transfused with this treated blood or blood component the patient may be exposed to psoralens or psoralen degradation

1

WQ 97/37536 PCT/U697/05785

products. This exposure to psoralens or psoralen degradation products may in turn cause undesirable effects on the patient such as phototoxicity or other toxic effects associated with psoralen and their decomposition products. Therefore, it is highly desirable to remove the remaining psoralen derivatives or decomposed psoralen products from the treated blood or blood component before any human use.

Currently there are no methods published which have been shown to remove the psoralen compounds and their decomposition products from blood and blood products.

10

15

#### Summary of the Invention

The present invention is drawn to a method for the removal of psoralen compounds and their decomposition products from psoralen-treated biological fluids, including but not limited to, blood and blood products. The method of the present invention utilizes a psoralen-adsorbent material which is contacted with the psoralen-treated biological fluid, such as blood or blood products. Biological fluids, blood or blood products that contain psoralen compounds or their decomposition products are treated according to the method of the present invention to produce a biological fluid, blood and blood components that are substantially free from psoralen compounds or psoralen decomposition products.

20

## Brief Description of the Drawings

Figure 1 shows an overall general view of the usage of this adsorption device. The first container(9) contains already irradiated blood or blood component(11) which contains residual psoralen or psoralen derivatives such as 8-MOP, AMT, HMT or other psoralen derivative and its decomposition products during earlier ultraviolet A irradiation. The treated fluid(11) is pumped by the pump(13) through the adsorption device(1), where the residual photosensitizer(s) or its byproducts are removed, into the second container(10).

30

25

Figure 2 shows a vertical cross-sectional view of the adsorption device(1). The cartridge is made of inlet cap(4), outlet cap(5), body casing(6), two stainless steel screens(7), and adsorbent(8). The stainless screens(7) contain the resin beads inside the cartridge and prevent them from coming out of the cartridge.

35

Figure 3 shows a horizontal cross-sectional view of the device(1). The adsorbent(8) is microporous beads of the size approximately 0.1-2mm in diameter and made from polystyrene or polystyrene copolymerized with divinylbenzene. These microporous beads have pore sizes in the range of molecular level, 10-1000 Angstroms, and

WO 97/37536 PCT/U897/05785

large pore surface area, 100-1,000 square meter per gram of the adsorbent. Good examples are XAD-4 and XAD-16 resin beads made by Rohm and Haas Company.

Figure 4 shows a cross-sectional view of another design of this invention. Here the edsorbent (14) is made of microporous fibers (14) instead of beads. The fibers could be in woven or non-woven configuration. By using fibers instead of beads the stainless steel screens (7) can be eliminated.

Figure 5 shows a cross-sectional view of the same device shown in figure 4. Here the cross-sections of the adsorbent fibers are shown. These adsorbent fibers are woven with other fine threads.

## Detailed Description of the Invention

25

30

35

It is the purpose of this invention to develop a method to remove the residual

photosensitizers such as proralen or its derivative(s) and its decomposition products, if any, from biological fluids such as treated blood or blood components so that the treated biological fluids can be transfused into patients substantially free from residual photosensitizer(s). Biological fluids that are suitable for use in the method of the present invention include, but are not limited to, whole blood, serum, plasma, blood fractions such as platelets, red cells, and buffy coat, extracts of blood or blood fractions such as proteins purified therefrom, and any biological fluid that has been treated with one or more psoralen compound.

Many psoralen adsorbent materials are suitable for use in the method of the present invention, and different physical forms of these materials can be made and are suitable for use in the method of the present invention. For instance, activated carbon in the form of microporous beads or fibers is a good psoralen adsorbent. But it has been found that activated carbon may also adsorb other components from blood or blood products. Therefore, its application in the method of the present invention is suitable only if the activated charcoal does not also remove a desirable component of the treated biological fluid. The preferred adsorbent materials for use in the method of the present invention are ones which adsorb the psoralens and psoralen decomposition products with minimum adsorption capacity for other desired components such as the components of blood and blood products for human use.

Microporous polymeric beads such as those made from polystyrene and polystyrene copolymerized with divinylbenzene are the preferred adsorbent materials for use in

WO 97/37536 PCT/US97/05785

the method of the present invention for psoralen, psoralen derivatives and their photodecomposition products.

It is readily apparent to those of ordinary skill in the art that virtually any fluid is suitable for use in the method of the present invention. In particular, any biological fluids that have been treated with psoralen compounds are suitable for use in this method of the present invention. Biological fluids that are commonly exposed to psoralen compounds include, but are not limited to, whole blood, plasma, serum, and any components isolated from blood or blood fractions. Psoralen compounds have been used for a variety of purposes which include the sterilization of human blood and blood-derived products to prevent transmission of hepatitis viruses, herpes viruses, HIV and any other infectious or oncogenic entity derived from blood donors; the sterilization of cell culture-derived biologicals, such as interferons. enzymes, hormones and vaccines, to inactivate any viral or nucleic acid contaminants; and therapeutically in humans by treating patients with psoralens, and then irradiating the blood in an extracorporeal circuit, followed by the return of the psoralen-treated blood to the patient.

10

20

25

30

35

It is also readily apparent to one of ordinary skill in the art that a variety of different psoralen-adsorbent materials are suitable for use in the method of the present invention. Examples of suitable types of psoralen-adsorbent materials include, but are not limited to, activated carbon beads or fibers which are uncoated or coated with biocompatable materials, ion exchange resins such as Dowex beads (commercially available from Dow Chemical Company, Midland Michigan), and amberlite beads (commercially available from Rohm and Haas Company, Philadelphia, Pennsylvania), with polystyrene and polystyrene copolymerized with divinylbenzene being most preferred.

It is readily apparent to those skilled in the art that the psoralen-treated biological fluid is contacted with the psoralen-adsorbent material in a variety of ways. For example, the biological fluid may be mixed in a batchwise fashion with the psoralen-adsorbent material, followed by removal of the psoralen-adsorbent material by standard separation means such as filtration or gravitational separation. Alternatively the psoralen-adsorbent material may be placed inside a standard chromatographic device such as a column through which is passed the psoralen-containing biological fluid.

It is also readily apparent to those skilled in the art that virtually any psoralen compound that is suitable for use in biological fluids, is suitable for use with the

WO 97/37536 PCT/US97/05785

method of the present invention. Psoralen compounds are well known in the art and are described in U.S. Patent 4,321,919; and U.S. Patent No. 4,960,408. Commonly used psoralen compounds include, but are not limited to, psoralen; 8-methoxy-psoralen; 4,5'8-trimethylpsoralen; 5-methoxypsoralen; 4-5'dimethyl-psoralen; 4,8-methoxypsoralen; 4-methylpsoralen; 4,4-dimethylpsoralen; 4'-hydroxymethyl-4,5',8-trimethylpsoralen; and 4'-aminomethyl-4,5',8-trimethylpsoralen.

The following Examples are provided to illustrate the present invention without, however, limiting the same thereto.

Example 1

10

15

20

In this experiment to demonstrate the adsorption capacity of styrene or styrene copolymer beads for psoralen derivatives, a glass pipette was used as a resin container and glass wool was used in place of stainless steel screen to keep the beads inside the pipette. A total of 8 grams of XAD-4 resin beads (commercially available from Rohm and Haas Co.) was filled into a pipette. Balls of glass wool were put at the bottom and top of the resin bed inside the pipette. The total bed volume of the resin beads was 11.4 mL. Several gallons of 0.5 ug/mL AMT (psoralen) solution in water was made, pumped through this small XAD-4 resin column, and AMT concentrations in the effluent was measured over time. The results are shown in Table 1.

Table 1

AMT Adsorption on XAD-4 Regin Column


Run No.	Perfusion Rate mL/min.	Percent Leakage In Last Sample	Total Volume Treated - mL
1	19.5	2.4	800
2	5.7	0.0	1,370
3	10.2	0.0	1,230
4	21.1	7.4	1,254
5	35,5	0.0	1,414
6	50.1	4.1	980
			total 7,048

The test was carried out at six different flow rates with the same cartridge. As the flow rate increases the resident time of the perfusate in the resin cartridge decreases allowing less time for adsorption to take place. Therefore, if the adsorption rate is slow or the capacity is low, the AMT concentration in the effluent should increase. The test results show that the AMT concentration in the effluent is practically zero and not effected by flow rate increase. These results show that XAD-4 resin beads have extremely high affinity for AMT both in capacity and adsorption rate.


## What is claimed is:


15


- 1. A method for the removal of psoralen compounds and psoralen degradation products from biological fluids, comprising:
  - a) contacting a biological fluid containing psoralen or psoralen degradation products with a psoralen-adsorbent material; and
- b) separating and collecting the biological fluid from the psoralenadsorbent material to provide a biological fluid substantially free from psoralen or psoralen degradation products.
  - 2. The method of claim 1 wherein the biological fluid is serum.
  - 3. The method of claim 1 wherein the biological fluid is plasma.
  - 4. The method of claim 1 wherein the biological fluid is red blood cells.
- 20 S. The method of claim 1 wherein the biological fluid is whole blood.
  - 6. The method of claim 1 wherein the psoralen-adsorbent material is selected from the group consisting of polystyrene and polystyrene divinylbenzene copolymer.
- 25 7. The method of claim 1 wherein the psoralen is 8-methoxypsoralen.

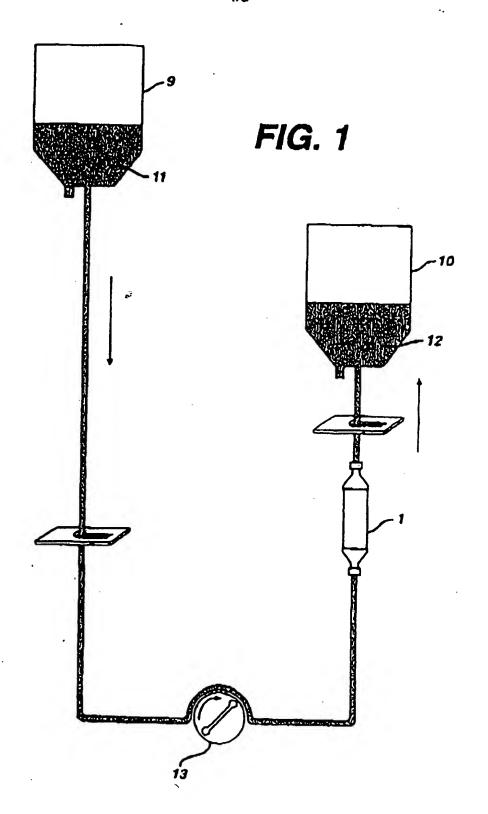

SUBSTITUTE SHEET (AULE 26)

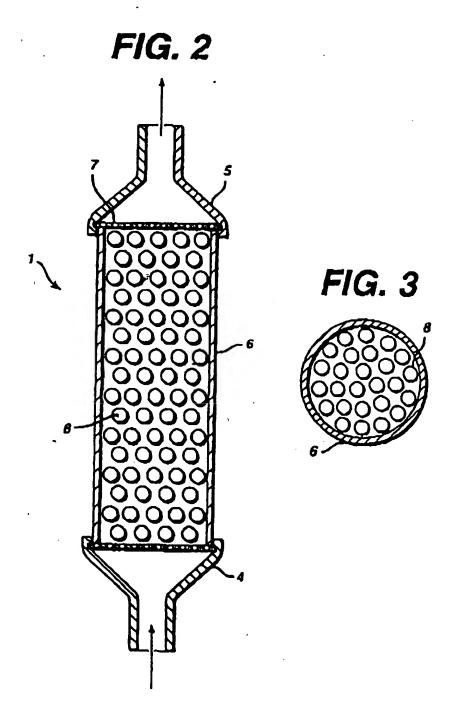





SUBSTITUTE SHEET (RULE 26)

## INTERNATIONAL SEARCH REPORT

International application No. PCT/US97/05785

A. CLASSIE	Water of the		161/039//0	O 187		
) IPC(4) (A01)	ICATION OF SUBJECT MATTER					
US CL : 435	/2. 278. 269. 372:536mag					
According to Ink	metional Palone Classification (IPC) or to	o both national classification a	IN IPC			
a. Merne 3	CARCHED					
Manimum docum	entation scarched (classification system fo	Howed by classification symb	ols)			
U.S. : 435/2	2. 238, 269, 272; 530/280	·	-			
Decumentation see	arched other than minimum d					
	rebed other than minimum documentation	to the extent that such docume	enu arc include	d in the fields searched		
<u> </u>						
Electronic data bas	e consulted during the informational scan	to large of Asia has				
APS: CAPLUS	: BIOSIS: EMBASE; MEDLINE: JICST	re thems of data bate and, wi	see blockicaps	:. search terms used)		
SEARCH TERM	is: Psoralens, Styrene, Polyst	re, wrids Yrene, divinylbenzene				
			•/ 			
	TS CONSIDERED TO BE RELEVAN					
Calcatory Ci	lation of document, with indicating, when	or programme of the minute				
				Relevant to elain No		
1 1-1-41	RGOLIS-NUNNO, H. et a	I. Elimination of	potential	1.7		
inac	agenicity in platelet con	centrates that are	e virally	• •		
page	sfusion. 1995, Volume 35, 855 and 857-858 and 860	, pages 855-862, e	specially			
1.	220 gird 037-938 and 860	<b>)</b> .				
US 4	1,693,981 A (WIESEHAHN	4. 01 1 2 C				
col.	6, lines 55-70.	ar any 13 gebtempe	er 1987.	1-7		
			,	j		
US 4	.748.120 A (WIESEHAHN) 5.	31 May 1988 col	1 15-0			
25-3	<b>5.</b>		. i. ine	1-7		
Dane	na 111 <b>2</b> 122			.		
0330	Database WPIDS on STN, Derwent Information Ltd., AN 88- 023972, JP 62283198 A (HASEGAWA CO. LTD.) 09					
1	mber 1987, abstract.	ASEGAWA CO. LT	D.) 09			
1 00000	moer 1967. abstract.			ŀ		
				~_		
1	•			1		
Purher docum	This are listed to the second second					
	mus are listed in the continuation of Box m of shall decrease:	C. Soo patent fami	ily wance.			
document and it		'T beer decreases publica	-	word filing das or proving		
		prociple or theory we	terbies the impai	und Carcol all proppersonant des		
decument which	profiched on or after the beamsternal filling duc	"X" declared of periods considered	reference the d	himal inventor course be		
المراجعة وا المراجعة	day throw deads so priorsy chartel or which a the publication date of number citation or other specified	- des de deserre à	when stone	a brane of specifies with		
document refere	its to and distinguis, was exhibited or estat	"Y" document of particular	Printeres the ci	timed investion counts be		
		period appropriate of them naturally ment and and an	mare policy south do see all illed to the as	Californi, onch association		
	ad prior to the international filing data but beer then things!	.s. deranet ischen of it				
r of the actual com	trees tenoiument at the noising	Date of insiting of the inter				
JUNE 1997		1 2 AUG 1997				
e and mailing awa	are of the 180 min					
THE PARAMET AT PARAME	eni Of the ISA/US and Tradeniarks	Authorital diffeer	6+			
whington, D.C. 2023	1	CHHAYA SXYALA	C 1-	l		
unik No.: 17031	205-2230	<b></b>		1		
PCT/LSA/210 (see	and sheet)fluly 19921-	1 stephnoc No. (703) 301	-0196			